



Code Enforcement
Parking Surface Regulations

City Code of Ordinances Chapter 12, Section 12-101.01

Additional Parking Regulations for Residential Properties

A. Corner Lot

- 1. Front yard - all vehicles must be parked on a concrete, asphalt, brick, paved stone or gravel driveway suitable for parking.
- 2. Side yard - all vehicles must be parked on a concrete, asphalt, brick, paved stone or gravel driveway suitable for parking OR be parked behind a screening fence.
- 3. Rear yard - all vehicles must be parked on a concrete, asphalt, brick, paved stone or gravel driveway suitable for parking OR be parked behind a screening fence.

B. Interior Lot.

- 1. Front yard - all vehicles must be parked on a concrete, asphalt, brick, paved stone or gravel driveway suitable for parking.
- 2. Side yard - all vehicles must be parked on a concrete, asphalt, brick, paved stone or gravel driveway suitable for parking OR be parked behind a screening fence.
- 3. Rear yard - no regulations apply.
- 4. All driveways must be a minimum of nine feet (9') in width and maintained in good condition.

C. Parking shall be regulated in accordance with Figure 1 [below]. Residents will have until January 1, 2008 to comply with the requirement for a concrete, asphalt or gravel parking area.

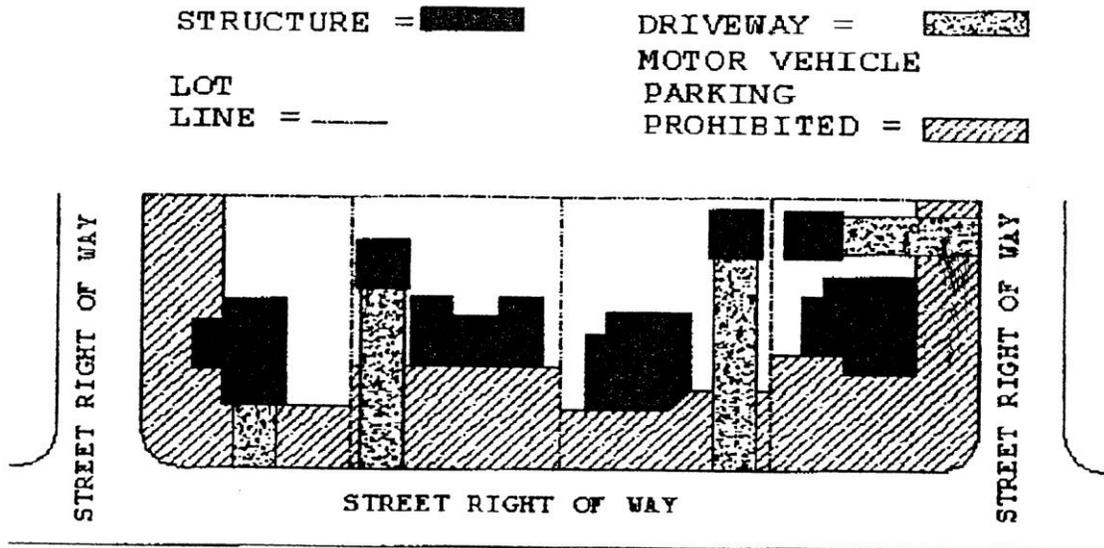


Figure 1